



SPK 8500

- Equipped with load holding valves for safe crane operations
- High speed boom extension and retraction with Return Oil Utilization
- Optimized lifting performance with the use of high tensile steel and hexagonal boom design
- Lightweight yet robust construction according to European standards (EN 12999)
- Optional Overload Protection and Emergency Stop Button
- Professional installation solutions
- Suitable for installation on 2-axle trucks

7.6 mt


Max. lifting
moment

7.6 m


Max. outreach

TECHNICAL SPECIFICATIONS (EN 12999 H1-B3)



Max. Lifting Moment	mt	7.6
Max. Lifting Capacity	kg	3300
Max. Outreach	m	5.7 (Std) / 7.6 (A)
Slewing Angle	o	400
Slewing Torque	mt	0.9
Stabilizer Spread	m	4.87 (R2 / R2X)
Fitting Space Required (Std)	m	0.66
Width Folded	m	2.295
Operating Pressure	bar	315
Recommended Pump Capacity	l/min	25 - 35
Dead Weight (Std)	kg	920

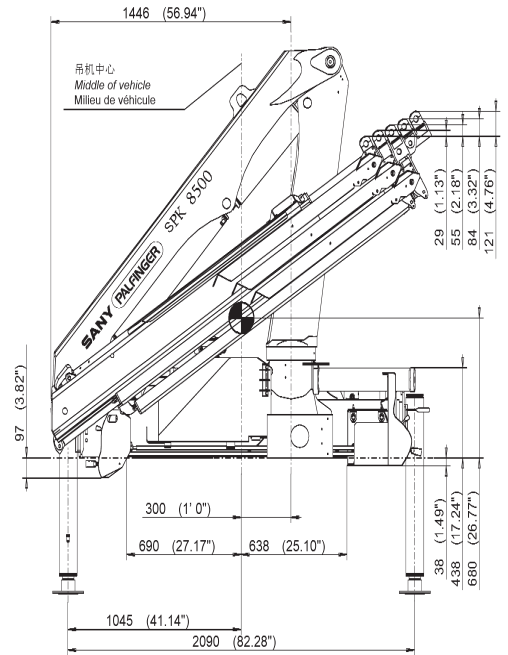

SPK 8500 Std

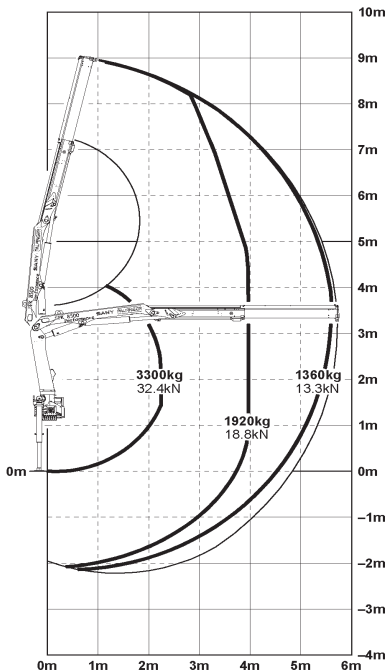

SPK 8500 A

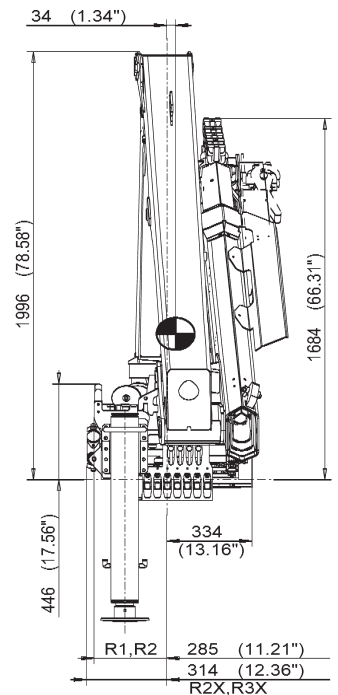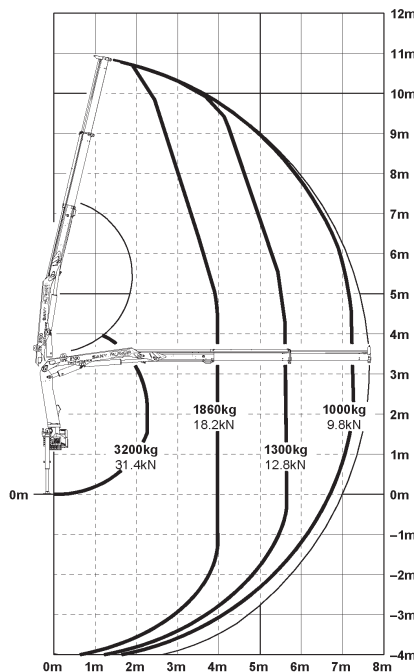

Authorized Dealer:

Units shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.