



SPK 36080 - MH

- Electronic Overload Protection (Paltronic 50) and Emergency Stop Button
- Up to 10% increased lifting capacity with High Power Lifting System (HPLS)
- High speed boom extension and retraction with Return Oil Utilization feature
- Optimized lifting performance with the use of high tensile steel and hexagonal boom design
- Light weight yet robust construction according to European standards (EN12999)
- Optional Overload Protection and Emergency Stop Button
- Professional Installation Solutions
- Suitable for installation on 3-axle trucks

34.8 mt


Max. lifting
moment

12.1 m


Max. outreach

TECHNICAL SPECIFICATIONS (EN 12999 H1-B3)



Max. Lifting Moment	mt	34.8
Max. Lifting Capacity	kg	8500
Max. Outreach	m	8.1 (A) / 10.1 (B) / 12.1 (C)
Slewing Angle	o	400
Slewing Torque	mt	3.8
Stabilizer Spread	m	6.0 (R3X)
Fitting Space Required (Std)	m	0.975
Width Folded	m	2.5
Operating Pressure	bar	330
Recommended Pump Capacity	l/min	55 - 80
Dead Weight (Std)	kg	3118

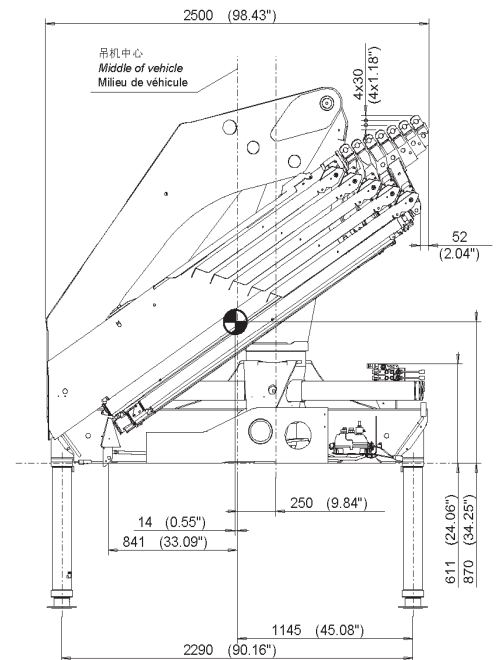

SPK 36080 A

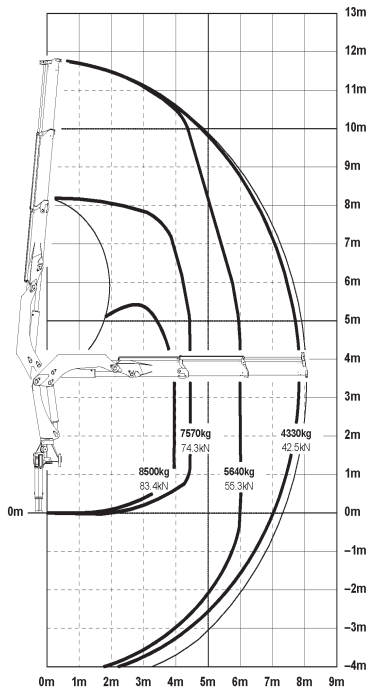

SPK 36080 C

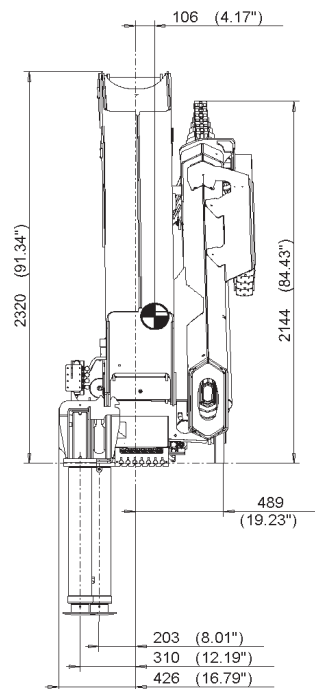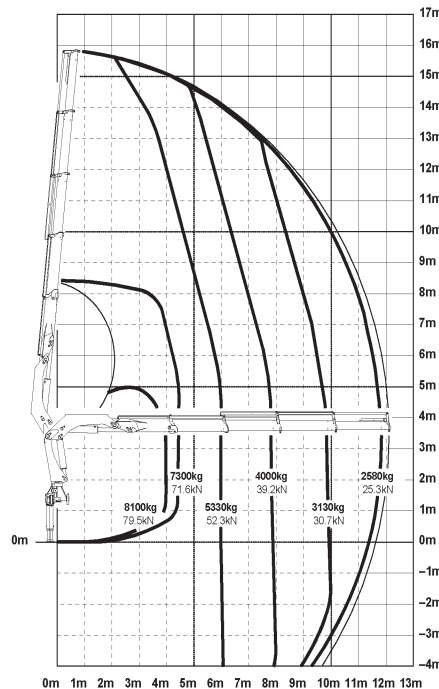

Authorized Dealer:

Units shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.